

CORA BIKE RACK

PRODUCT SPECIFICATION SHEET



CBL SERIES

CBL2 LIGHT DUTY BIKE LOCKER

Two doors and a secure divider provide Security Level A parking facilities for 2 bikes. This is the most cost-effective option per bike space. Designed for quick and easy assembly. Select from several locking options. This is a light duty version of the original CBL2. Light duty lockers are suitable for indoor applications to reduce costs.



Capacity

- Provides secure storage for 2 bicycles
- Can be mounted in a line for multiple bike installs

Construction

- Light duty

Fixings

- Stainless steel anchor bolts fixed to ground
- Stainless steel screws for assembly

Finishes

- HDG steel frame
- 1.0mm galvanised steel panels
- Option - powder coated panels (on request)

Assembly

- Supplied flat packed and partially assembled for full assembly and quick mounting on site

Locking

- Secure 3 point door locking mechanism
- Key Option - supplied with individual keys for each locker door
- Latch Option - allows user supplied U lock or padlock
- Electronic Option - battery powered key pad

Compliance

- Locker is AS2890.3 (2015) compliant



CORA BIKE RACK


PRODUCT SPECIFICATION SHEET

CBL2 SERIES BIKE LOCKER LAYOUT GUIDE


To comply with AS2890.3 (2015) minimum 2000mm aisle spacing between lockers or to wall or obstructions is required.

For specific assembly and installation instructions relating to CBL Series lockers, please refer to individual instruction information sheets.

Lockers should not be installed, based on the information on this sheet alone.

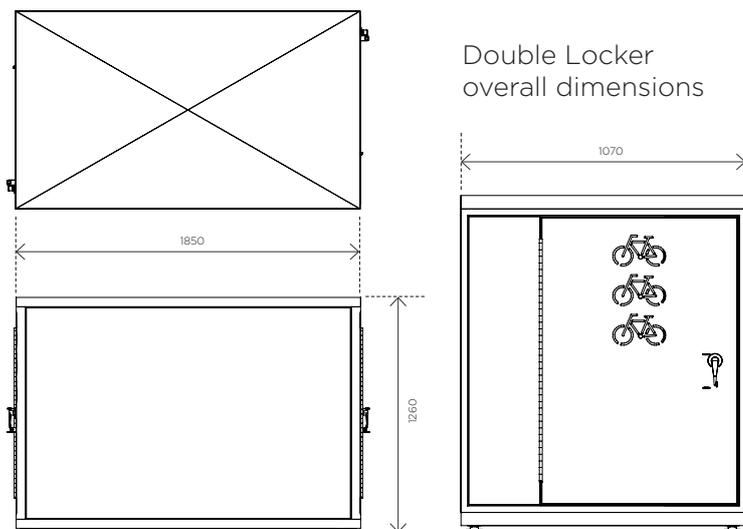

Double Locker overall dimensions


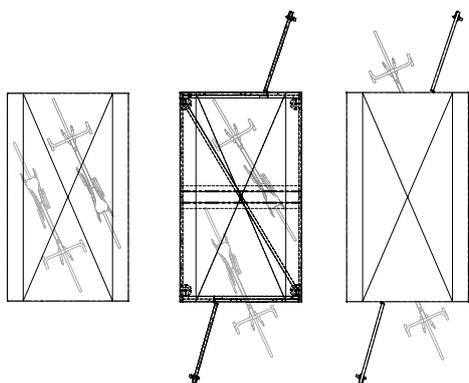


Bike access and storage

- Bicycles stored individually and separated by secure internal wall
- Independent access to each bicycle and locking of each door
- Both sides include internal hooks for helmet and bag hanging

Single or Multiple install of lockers

Lockers can be installed either as a single locker or next to each other in rows, in multiples as required

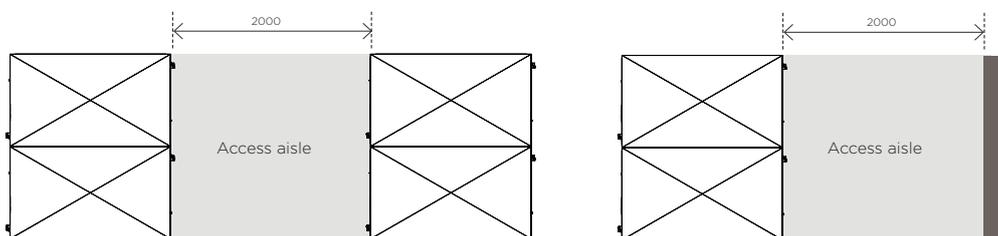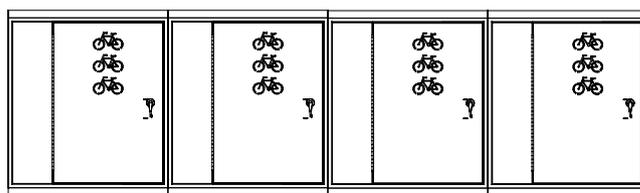

Minimum 2000mm aisle spacing between lockers

Minimum 2000mm aisle spacing between lockers and wall or obstructions



PH 1800 249 878

sales@cora.com.au

www.cora.com.au