

Assembly & Wall Mounting Instructions

Cora Bike Rack - F3VR-DYN

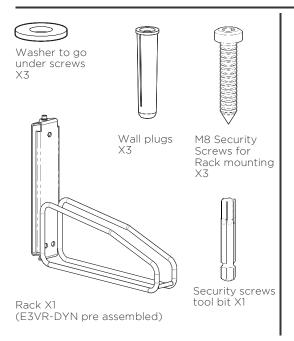

1. If mounting multiple racks, measure mounting distance between racks and other obstructions and height from ground

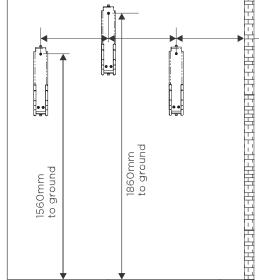

min.400mm spacing between racks or from walls


To **comply** with AS2890.3 (2015) minimum 400mm spacing between rack centres to edge of walls or other obstructions

OR if no height alternation of racks, minimum 600mm spacing between rack centres and to edge of walls or other obstructions

2. Mounting height of single or multiple adjacent racks E3VR-DYN


For Single mounted rack

If mounting only one rack, the rack should be fixed in lower position to minimise lifting for cyclist

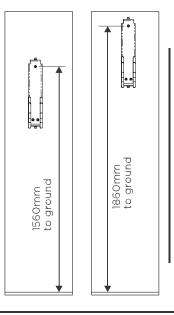


For Multiple mounted racks

- If multiple racks are being mounted next to each other, Rack height must be alternated
- NOTE: If all racks are to be mounted at the same height, racks must be spaced at 600mm centres

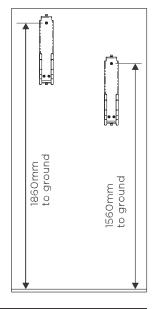




Drill three (3) holes at

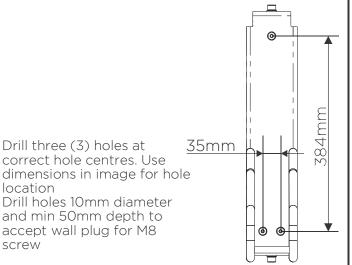

4. Insert wall plugs

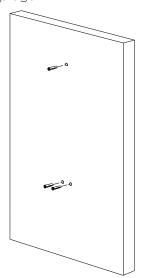


screw


and min 50mm depth to accept wall plug for M8

Assembly & Wall Mounting Instructions


Cora Bike Rack - E3VR-DYN

5. Fasten rack to wall

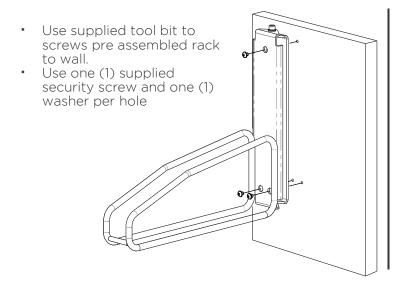



6. Access and clearance around mounted racks

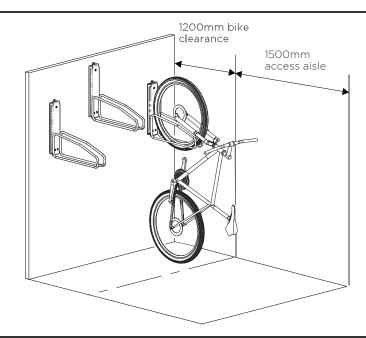

Access dimensions around racks

- Racks are to be mounted with minimum clearance zones from any wall a rack is mounted to
- Min. 1200mm from wall for bike clearance & minimum 1500mm additional for access aisle



Australia's Bike Parking Experts

PH 1800 249 878 sales@cora.com.au www.cora.com.au



